



Learn More



Description

The LQA60W series is a compact 60W isolated DC-DC converter housed in a 2"x1" package, supporting wide nominal input voltages of 110VDC. It provides stable single outputs from 5V to 48V with efficiencies up to 92%, high isolation up to 3kVDC, and reliable operation from -40°C to +105°C. Designed to meet EN62368-1, EN50155 and EN55032/35 standards, it is ideal for industrial control, Tele-cimunication and Railway applications.

Features


- High Efficiency 60W power in compact size 2"x1" package
- No minimum load required
- Wide operating temperature from -40°C to +105°C
- Continuous short circuit protection
- Over load protection/ over voltage protection/ over temperature protection
- Six-sided continuous shield
- EN50155, EN45545-2 railway standard approvals

Applications

- Industry Control System
- Save Space Solution
- Telecommunications
- Industrial
- Railway

Model Numbering

LQA 60 W 4 - 110 **05**

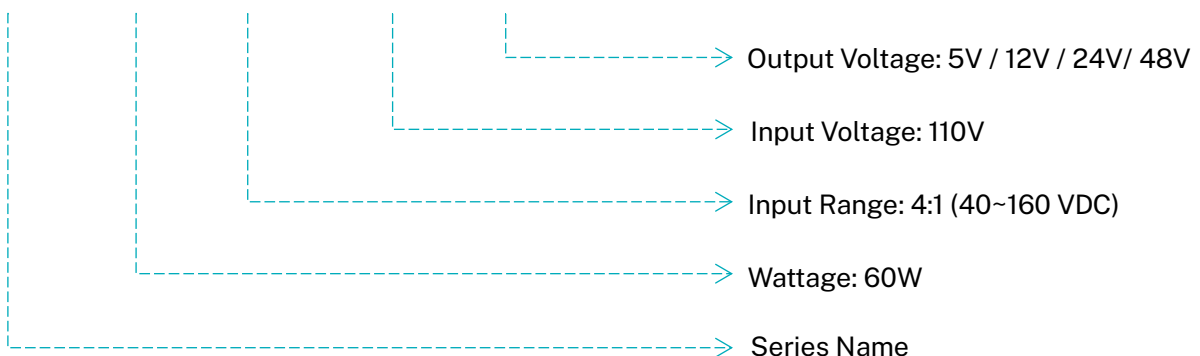

Model Selection Guide

Part No.	Input Voltage	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency ⁽¹⁾ (Typ.)	Capacitor Load ⁽²⁾ (Max.)
LQA60W4-11005	40-160 VDC Nom. 110VDC	5VDC	12000mA	10mA	89%	28000 μ F
LQA60W4-11012		12VDC	5000mA	10mA	90%	58500 μ F
LQA60W4-11024		24VDC	2500mA	10mA	90%	2000 μ F
LQA60W4-11048		48VDC	1250mA	10mA	88.5%	390 μ F

Notes

- #1: The efficiency is test by nominal input and max. full load @ 25°C.
- #2: The capacitive load is test by minimum input and constant resistive load.
- #3: All specifications valid at nominal input voltage, full load and 25°C after warm-up time unless otherwise stated.
- #4: The product information and specifications are subject to change without prior notice.

Electrical Specification

Model Number		LQA60W4-□□
Input		
Input Filter	Pi type	
Input Voltage Range	40V-160VDC	
Start-Up Time (100% load at nominal Vin)	50ms	
Start-Up Voltage (0%-100% load)	40VDC	
Under Voltage Lockout (0%-100% load)	34VDC	
Input Surge Voltage	200VDC	
Remote ON/OFF	DC-DC ON	Open or $3.5 < V_r < 12\text{VDC}$
	DC-DC OFF	Short or $0 < V_r < 1.2\text{VDC}$
Output		
Voltage Accuracy	$\pm 1\%$ (100% Load at Nominal Vin)	
Line Regulation (LL to HL 100% load)	$\pm 0.2\%$	
Load Regulation (0% to 100% Load)	$\pm 0.5\%$	
Ripple & Noise (20MHZ BW at Vin range 0%~100% load, with a 1 μ F/50V X7R MLCC)	100 mVp-p (5V)	
	150 mVp-p (12V, 24V)	
	200 mVp-p (48V)	
Minimum Load	0%	
Voltage Adjustability	$\pm 10\%$	
Operating Frequency	250 KHz @ 100% Load at nominal Vin	
Environment		
Operating Temperature	-40-+105 °C with derating	
Storage Temperature	-55-+125 °C	
Max. Case Temperature	110°C	

Temperature Coefficient	± 0.05%/°C	
Relative Humidity	5%-95% RH	
MTBF (MIL-HDBK-217F)	779 KHours (25°C)	
Vibration	MIL-STD-810F	
Function		
Isolation Voltage	3 KVDC 1min. Input to Output	
Isolation Resistance	1000 MΩ @ 500VDC	
Isolation Capacitance	1500 pF	
Short Circuit Protection	Continuous, Automatic recovery	
Over Load Protection	175% typ. (130% - 210%)	
Over Voltage Protection (Zener Diode Clamp)	5V output	5.6-8.0VDC
	12V output	13.4-19.2VDC
	24V output	26.9-38.4VDC
	48V output	53.8-76.8VDC
Short Circuit Protection	Continuous, automatic recovery	
Over Temperature Protection	115 °C TC (Case Temperature)	
Safety Approvals	EN62368-1/ IEC62368-1/ EN50155/ EN55032&35	
Physical		
Case Material	Metal Case	
Potting Material	Silicone (94V-0)	
Cooling Method	Natural convection	
Dimension	50.8(L) x 25.4(W) x 10.5(H) mm	
Weight	45 g	
Electromagnetic Compatibility		
Electromagnetic Interference	EN 55032,EN55011 (Class A/B)	
Electrostatic Discharge	IEC 61000-4-2, Air±8kV; Contact±6kV (Criteria A)	
Radiated Immunity	IEC 61000-4-3, 10V/m (Criteria A)	
Electrical Fast Transient	IEC 61000-4-4, ±2kV (Criteria A)	
Surge Immunity	IEC 61000-4-5, ±2kV (Criteria A)	

Conducted Immunity	IEC 61000-4-6, 10V/m (Criteria A)
Magnetic Field Immunity	IEC 61000-4-8, 10A/m(Criteria A)


Notes

- #1: All specifications valid at nominal input voltage, full load and 25°C after warm-up time unless otherwise stated.
- #2: The product information and specifications are subject to change without prior notice.
- #3: Derating measured with nominal line. Mounted test board.
(90 x 80 mm and each power pin with 43 x 40 mm, 2Oz double layer)


Mechanical Specification

Derating Curve

Ambient temperature
LQA60W4-11012/LQA60W4-11024

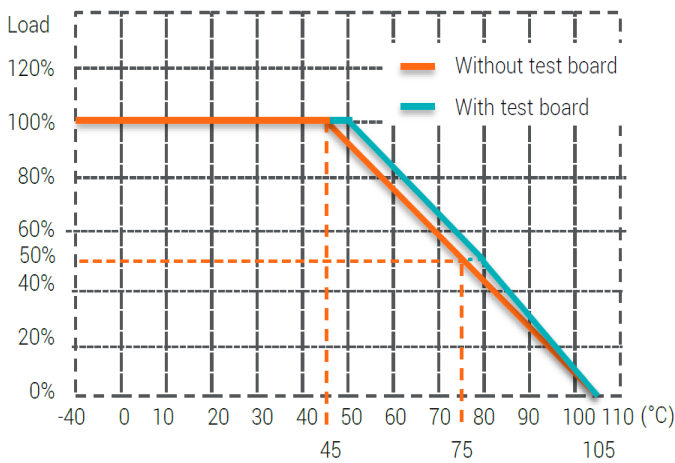

Ambient temperature
LQA60W4-11005/LQA60W4-11048

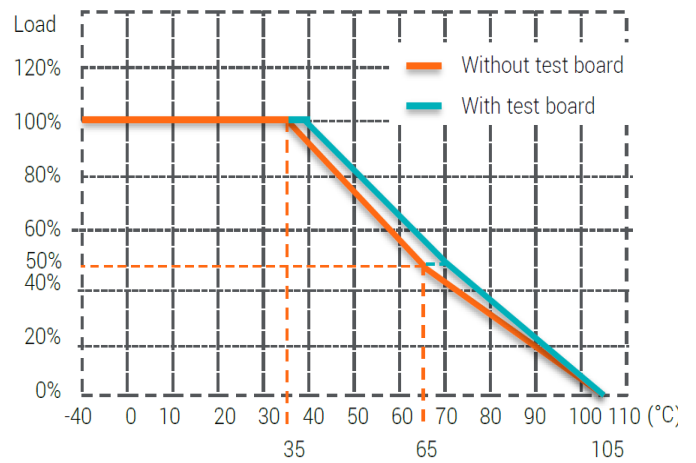


— The derating curve was measured at nominal V_{in} in chamber with nature convection.

— The derating curve was measured with nominal line. Mounted test board.


Ripple & Noise Measure Method

5V, 12V

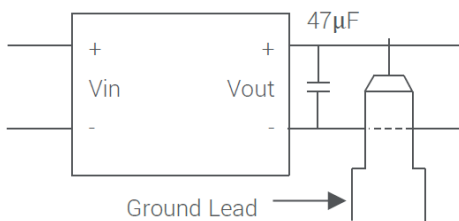

Measured with 20MHz bandwidth and 47µF capacitor capacitor.


24V, 48V

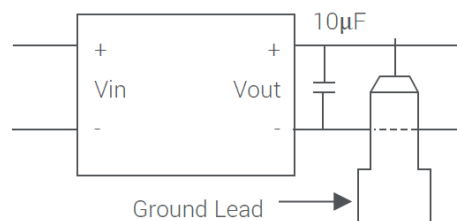

Measured with 20MHz bandwidth and 10µF capacitor capacitor.


EMI Filtering-Suggestion for Class B

EN55032 CLASS A

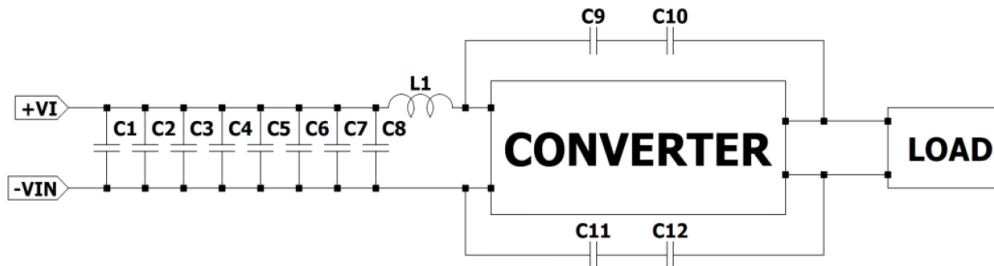


Vin	L1	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12
110V	68 μ H	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F	4700 pF	4700 pF	4700 pF	4700 pF

EN55032 CLASS B

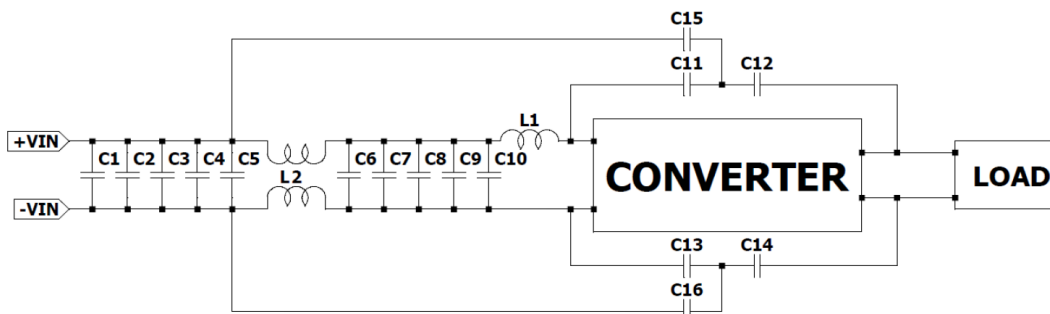

Vout	L1	L2	C1	C2	C3	C4	C5	C6	C7
05/12V	68 μ H	2.2 mH	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F
24/48V	68 μ H	2.2 mH	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F	0.68 μ F
Vout	C8	C9	C10	C11	C12	C13	C14	C15	C16
05/12V	0.68 μ F	0.68 μ F	0.68 μ F	4700 pF	4700 pF	4700 pF	4700 pF	47 pF	47 pF
24/48V	0.68 μ F	0.68 μ F	0.68 μ F	4700 pF	4700 pF	4700 pF	4700 pF	33 pF	33 pF


Mechanical Dimension & Pinning

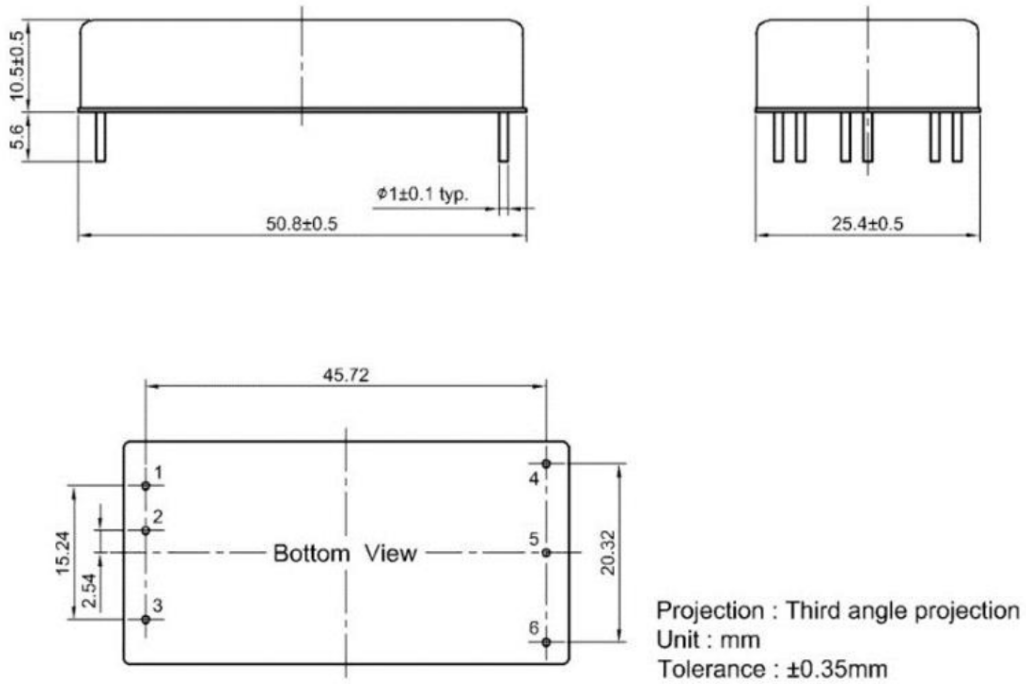

Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	-Vout	COM
6	Trim	-Vout

Package

Anti-static liquid tube

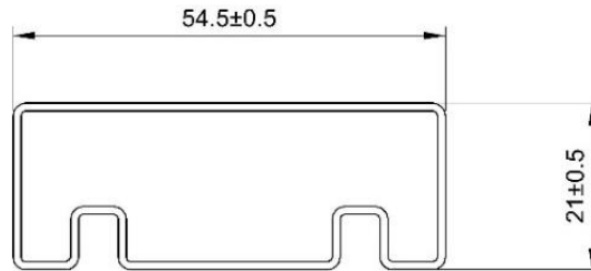

UNIT:mm
1 Tube = 18 pcs
Length: 520 ± 2 mm

Recommend Footprint

