

# 80W Adapter 53.5V Series

**LITEON**

## Single Output 80W PFC Data Sheet

For the latest revision, please visit [power.liteon.com](http://power.liteon.com)

### Description

This product is an 80watts AC to DC adapter intended for use in IPC Systems, Communication Systems, Embedded Systems, PoE Systems. This adapter operates at 90 to 264 VAC input voltage. The unit meets CISPR32 EN55032 CLASS B, EN55024 and FCC PART 15B Class B emission limits, and is designed for ITE application.

### Features

- \* Full AC input voltage design with C14 socket
- \* Withstand 300Vac surge voltage for 5 seconds
- \* Full Protections: Short-circuit/ Over-voltage/ Over-current/ Over temperature operating.
- \* Energy efficiency level VI compliance
- \* Slim and compact in size
- \* Various DC plug types available
- \* IEC/EN 62368-1 design compliance
- \* Up to 5000 meters operating altitude (note #4)
- \* High reliability



### Electrical Specification

Model Name	PA-1800-01
<b>Output</b>	
Rated power	80W
Rated voltage	53.5V
Rated current	1.5A
Ripple & Noise(max.) (note #2)	500mV
Line & load regulation	±5%
Hold-up time(typ.)	10ms
Timing: AC ON delay / rising (max.)	3 sec / 50ms
<b>Input</b>	
Rated voltage range	100~240Vac
Operated voltage range	90~264Vac, 300Vac for 5 sec
Current range (max.)	2A/100Vac
Inrush current	No component damaged (<I <sup>2</sup> *t).

Frequency range	50-60Hz
Leakage current (max.)	0.25mA at 240Vac
Average efficiency (min.)	88%
<b>Protection Function</b>	
Over voltage (max.)	130% of rated voltage, latch protection until AC input reset
Over current (max.)	150% of rated current, latch protection until AC input reset
Short circuit at O/P	No damage, latch protection until AC input reset
Over temperature	No damage, latch protection until AC input reset
<b>Others</b>	
MTBF (min.) (note#3)	300K hours @ rated load
<b>Environment</b>	
Temperature (note#5)	(operating) -20~45°C / (storage) -40~85°C
Humidity	(operating) 10~90% RH non-condensing / (storage) 5~95% RH
Altitude (max.)	5000 meters
<b>Mechanical</b>	
Dimension	128.5(L)*44(W)*30mm(H)
Vibration	10~500 Hz, 5G 20min./1cycle per axis for all axes (X, Y, Z)
Weight (typ.)	185g
<b>Safety</b>	
Standard	IEC/EN 62368-1, CNS14336-1
Withstand voltage	Input-Output: 4242VDC
Isolation resistance(min.)	Input-Output: 30Mohm @ 500VDC, 25°C, 70%RH
<b>EMC</b>	
EN55032 (CISPR32)	Conducted EMI: class B / Radiated EMI: class B
FCC	Conducted EMI: class B / Radiated EMI: class B
EN61000-3-2	Harmonic distortion: Class D
EN61000-4-2	ESD: ±8KV contact discharge / ±15KV contact discharge
EN61000-4-3	Radiated RF immunity: 3V/m
EN61000-4-4	EFT: ±1KV (AC port)
EN61000-4-5	Surge: ±2KV DM / ±4KV CM
EN61000-4-6	Conducted RF immunity: 3V/m
EN61000-4-8	Magnetic field immunity: 3A/m
EN61000-4-11	Voltage dip immunity

## Notes



#1: All specification defined at 230Vac/50Hz, rated power and 25°C ambient temperature if not mentioned specifically.

#2: Ripple noise is measured by a 30cm length, twisted wires with 0.47uF MLCC & 47uF low ESR capacitor.

#3: Calculated by Telcordia SR332 at 25°C ambient temperature.

#4: When operating altitude is higher than 2000m, the environment temperature derating factor is 0.36°C/100m.

#5: De-rating curve of ambient temperature:

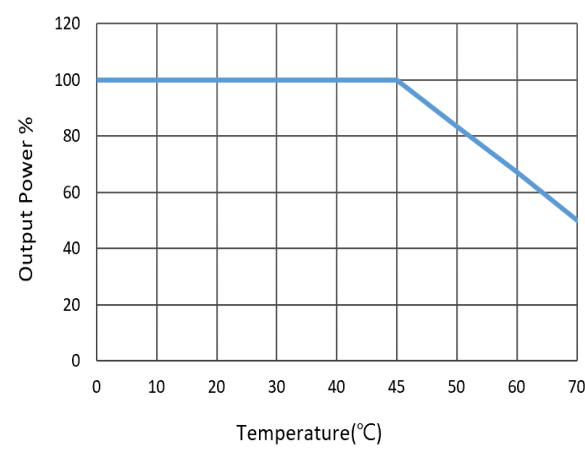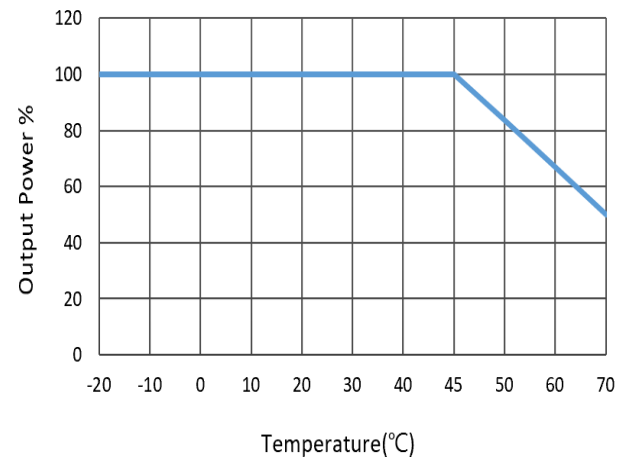

Mechanical Specification

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1. ALL DIMENSIONS ARE IN mm. TOLERANCES TO BE  $\pm 0.25$  mm.
- 2. PARTS SPECIFIED AS FOLLOWS:
  - 2-1. ENCLOSURE:
    - \* MEET V-0 FLAMMABILITY.
    - \* COLOR: BLACK.
    - \* TEXTURE: MOLDTECH MT11020.
  - 2-2. AC RECEPTACLE:
    - \* IEC 320, C8 CERTIFIED, 2 WAY.
    - \* COLOR: BLACK.
  - 2-3. DC OUTPUT:
    - \* CABLE: UL/CSA CERTIFIED VW-1, 80°C, 16~20AWG, BLACK.
    - \* CONNECTOR: MOLEX P/N 43645-0200
    - \* TERMINAL: MOLEX P/N 43030-0002 (GOLD PLATED CRIMP)
    - \* JACKET COLOR: BLACK.

